



STX

ROTARY FLOW SPLITTER



Equipment suitable for the correct grading of products on several machines, from two up to five gradings. I

It is suitable for both grains, milling products and by-products.

It is available in stainless steel.





Technical Information

Model	Dimensions (mm)				Rotor		Maximum capacity (T/h)*		Geared motor	Net weight (Kg)	Shipping volume (m³)
	A	B	C	ØiE	Dimensions (mm)		Gritz 600 (Kg/m³)	Milling product 500 (Kg/m³)	Power installed (kW)		
					Ø	Lenght					
STX 202	578	598	440	150 120	200	264	8,5	7,1	1,1	78	0,24
STX 203	713	598	440	180 150 120	200	399	12,8	10,6		84	0,32
STX 204	858	598	440	180 150 120	200	544	17,5	14,5		95	0,36
STX 303	878	737	680	220 180 150	300	564	30,5	25,4		120	0,65
STX 304	1087	737	680	273 220 180	300	764	41,3	34,4		135	0,85
STX 305	1288	737	680	120	300	964	41,3	34,4		180	0,98

*For other applications, please refer to evaluation with technicians.

The technical specifications of the equipment are subject to change without prior notice. The data may not be entirely consistent with the marketed versions.

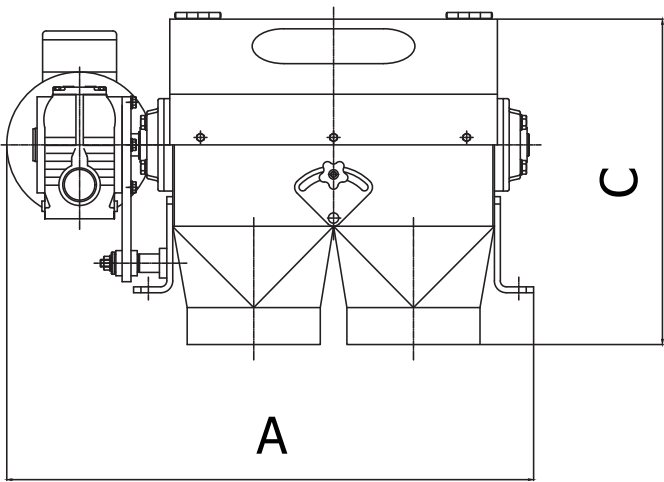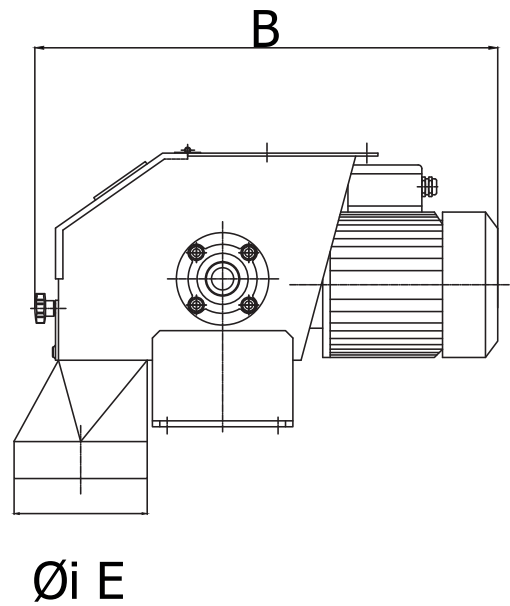



OCRIM S.p.A. - Via Massarotti, 76 - 26100 Cremona (Italy)



www.ocrim.com